

# Cooper Lighting

Metalux VT3 LED vaportite luminaire, IP67



## Metalux VT3

Vaportite LED luminaire, IP 67

### Catalogue numbers - Vaportite LED luminaire

Description	Light output, lm	Catalogue number	Weight each, kg	Packing size
Luminaire, length 651 mm	4000	IL2VT3-4-5K-G1-U	1,5	1
Luminaire, length 1197 mm	6000	IL4VT3-6-5K-G1-U	3	1
Luminaire with 10 W emergency light, length 1197 mm	6000	IL4VT3-6-5K-G1-U-A	3,5	1

### Technical data

#### Electrical data

Supply voltage	100-277 VAC, 50-60 Hz
Light source	LED strip with electronic driver, 5000 K
Dimming control	0-10 V signal
Power consumption, 651 mm/1197 mm	32/51 W
Projected life	60000 hours at 91% lumen output

#### Fixture data

Housing	Glass fibre reinforced polyester, white
Reflector	White painted steel
Diffuser	Polycarbonate, frosted
Cable entry	2 pcs 0,5" NPT


#### Environmental data

Installation	Indoor
Ambient temperature	-40 - +55°C, luminaire with emergency light -40 - +35°C
Ingress protection	IP 67, NEMA 4X, Wet Location

#### Approvals

Certificate, approval	RoHS, cUL file E328008
-----------------------	------------------------


### Photometric data

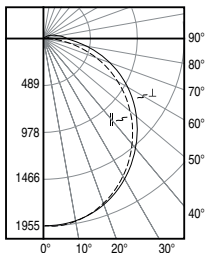

#### IL4VT3-6-5K-G1-U

Light source	LED, 6000 K
Lumens	6033 lm
Efficacy	118,1 lm/W
Power consumption	51 W
Spacing criterion	Il: 1,24 x mounting height L: 1,26 x mounting height

### Installation

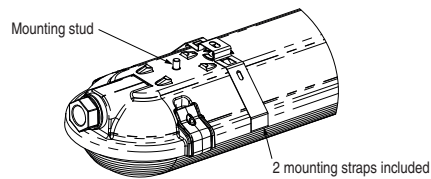

### Dimensions, mm

