

# CHS Controls

Sockets according to BS standard



Alltid tillgänglig - Alltid öppen!  
[www.chscontrols.se](http://www.chscontrols.se)  
Always available - Always open!

## Sockets according to BS standard

### Surface mount

#### Technical data



#### Standard range

#### Industrial


#### Weatherproof

Material	Termoset	Metal, painted grey - Metalclad	Polycarbonate
Rated voltage/Rated current	240 VAC/13 A	240 VAC/13 A	240 VAC/13 A
Temperature range	-5 - +40°C	-5 - +40°C	-5 - +40°C
Ingress protection, IEC 60529	IP 20	IP 20	IP 66
Child resistant shutters	Yes	Yes	Yes
Switch, some versions	2 pole	2 pole	2 pole
Terminals	2,5-6 mm <sup>2</sup>	2,5-6 mm <sup>2</sup>	2,5-6 mm <sup>2</sup>
Cable entry	Knockouts in sides and bottom	20 mm knockouts in sides and bottom	20 mm holes in sides, covered
Standard	BS 1363:1995	BS 1363:1995	BS1363:1995


#### Catalogue numbers

Description	Socket		Switched socket		Weight each, g Single/Double
	Single - 1 gang	Double - 2 gang	Single - 1 gang	Double - 2 gang	
Standard range, white	IUBSSM1G240R		IUBSSM1G240RS		185
Industrial, Metalclad, grey	IUBSMC1G240R	IUBSMC2G240R	IUBSMC1G240RS	IUBSMC2G240RS	270/420
Weatherproof, IP 66, light grey	IUBSWP1G240R		IUBSWP1G240RS		450




#### Dimensions, mm

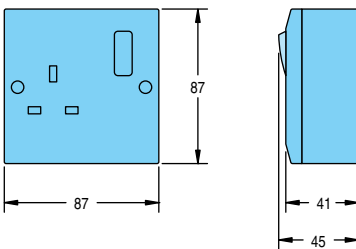

Standard range



Industrial - Metalclad

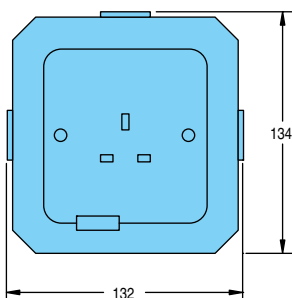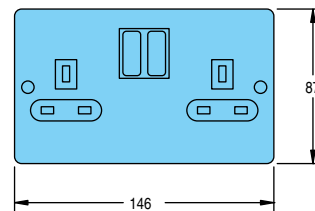

Weatherproof, IP 66

